




# DRILLS WITH FEED SPINDLE

TOOLS FOR THE SPECIALIST

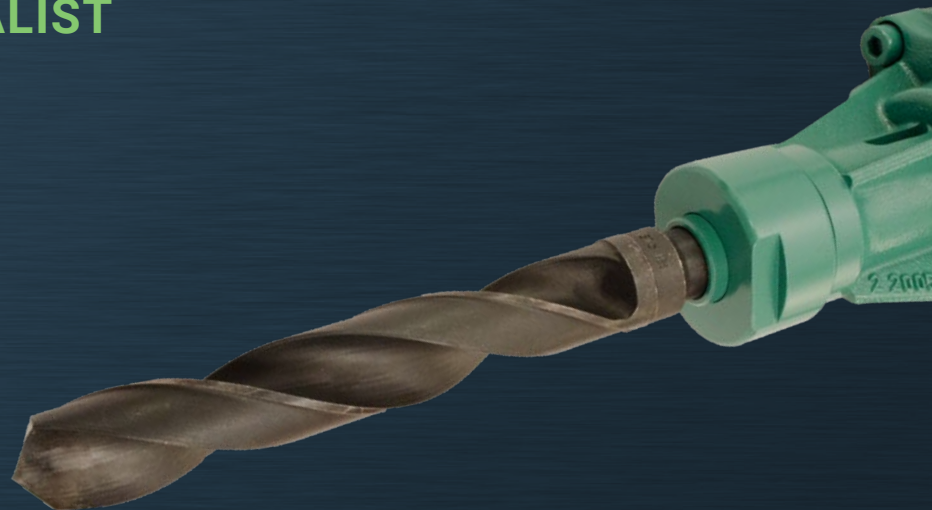

PNEUMATIC



ATEX



# SYSTEM CONCEPT



Handle  
with sound absorber



Safety lever valve  
or safety twist throttle



Air connection



ATEX-Safety class  
approved



Drill chuck



Direction of rotation right or reversible



Feed spindle with centering





## PNEUMATIC

The pneumatic drill with feed spindle are available for different drilling diameter and speed, as well with direction of rotation right or reversible.



ORDER NO.	ATEX Specification	Drill chuck	Valve type	Direction of rotation	Max. drilling diameter in steel mm	Speed (under load) rpm	OPERATING PRESSURE 6 Bar		Noise level LpA dB(A)	Vibration level m/s <sup>2</sup>	Weight kg
							Power kW	Air consumption m <sup>3</sup> /min			
<b>2 1401 0010</b>		MT2	Safety lever valve	right	20.00	325	0.68	0.68	93.5	<2.5	5.0
<b>2 1401 0030</b>		MT2	Safety twist throttle	right	20.00	325	0.68	0.68	93.5	<2.5	5.0
<b>2 1402 0010</b>		MT3	Safety lever valve	right	25.00	40	0.68	0.68	93.8	<2.5	8.0
<b>2 1402 0030</b>		MT3	Safety twist throttle	right	25.00	40	0.68	0.68	93.8	<2.5	8.0
<b>2 2502 0010</b>	II2GExhIIBT6Gb	MT4	Safety lever valve	right/left	50.00	80	1.85	2.00	87.0	<2.5	17.2
<b>2 2502 0030</b>	II2GExhIIBT6Gb	MT4	Safety twist throttle	right/left	50.00	80	1.85	2.00	87.0	<2.5	17.2
<b>2 2506 010</b>	II2GExhIIBT6Gb	MT3	Safety lever valve	right/left	32.00	220	1.85	2.00	87.0	<2.5	14.7
<b>2 2506 0030</b>	II2GExhIIBT6Gb	MT3	Safety twist throttle	right/left	32.00	220	1.85	2.00	87.0	<2.5	14.7
<b>2 2082 0010</b>	II2GExhIIBT6Gb	MT3	Safety lever valve	right	32.00	200	1.00	1.20	92.0	3.3	12.5
<b>2 2082 0030</b>	II2GExhIIBT6Gb	MT3	Safety twist throttle	right	32.00	200	1.00	1.20	92.0	3.3	12.5
<b>2 2084 0010</b>	II2GExhIIBT6Gb	MT2	Safety lever valve	right	23.00	200	1.00	1.20	92.0	3.3	12.0
<b>2 2084 0030</b>	II2GExhIIBT6Gb	MT2	Safety twist throttle	right	23.00	200	1.00	1.20	92.0	3.3	12.0
<b>2 2085 0010</b>	II2GExhIIBT6Gb	MT2	Safety lever valve	right/left	23.00	250	1.00	1.20	92.0	3.3	12.0
<b>2 2085 0030</b>	II2GExhIIBT6Gb	MT2	Safety twist throttle	right/left	23.00	250	1.00	1.20	92.0	3.3	12.0
<b>2 2089 0010</b>	II2GExhIIBT6Gb	MT3	Safety lever valve	right/left	32.00	250	1.25	1.50	92.0	3.3	12.5
<b>2 2089 0030</b>	II2GExhIIBT6Gb	MT3	Safety twist throttle	right/left	32.00	250	1.25	1.50	92.0	3.3	12.5

Subject to technical change.


Performance data at an operating pressure of 6 bar.

# TECHNICAL DATA

# SYSTEM ACCESSORIES

## SERVICE UNITS

ORDER NO.	Pos.	Description
9 2406 0260	1	Portable service unit with pressure regulator 3/4"
9 2406 0650	2	Portable service unit with protection housing and pressure regulator 3/4"



## MISCELLANEOUS ACCESSORIES

ORDER NO.	Description
9 9902 0120	Multi oil for cleaning and protection



More accessories on request.

## DRILL RANGE

### DRILLS



### IMPACT DRILLS



### CORNER DRILLS



### HAMMER DRILLS



### CORE DILL UNITS



### MAGNETIC CORE DRILLS



0721E